


ITEM	SPECIFICATIONS
A.	20 AWG 19X.0073TC UNILAY
B.	9 MIL PVC INSULATION 105C 300V 8 MIL MIN. PVC INSULATION O.D.: .056 ± .002"
C.	4 MIL MIN. NYLON OVERCOAT 105C 300V O.D.: .066 ± .002"
D.	20 AWG 19X.0073TC DRAIN
E.	POLY FILLER
F.	ALUMINUM FOIL SHIELD; FOIL IN 25% MIN. OVERLAP 100% COVERAGE
G.	35 MIL PRESSURED PVC JACKET 105C 300V 30 MIL MIN. PVC JACKET
UL LISTED & CSA CERTIFIED	
ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU	

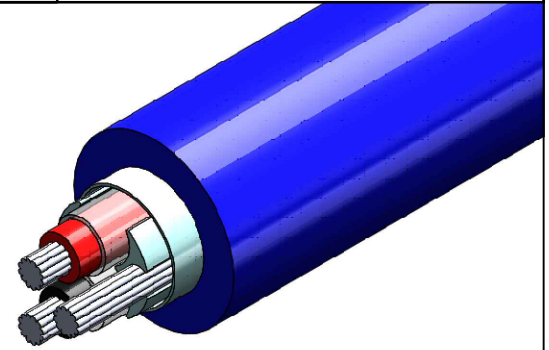

ISOMETRIC VIEW
FOR REFERENCE ONLY

MRO PART NO:	JACKET COLOR
PVC2C-20GBLU-DB	BLU
PVC2C-20GGRN-DB	GRN
PVC2C-20GYEL-DB	YEL
PVC2C-20GGRY-DB	GRA

LEGEND SPECIFICATIONS: BLACK INK JET PRINT

OSCEOLA: (UL) 20 AWG/2 PLTC DIRECT BURIAL 105C E90625 SUNLIGHT RESISTANT OIL RES I OR CSA AWM LL54185 I/II A/B 105C 300V FT4.

PART NO: PVC2C-20G-DB	
DESCRIPTION: 20 AWG/2 PLTC 105C 300V DIRECT BURIAL	
REVISION	SIZE SHEET
1.0	A No. 1 OF 1
THIS INFORMATION IS CONFIDENTIAL AND DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE WITHOUT AUTHORIZATION FROM MRO	

Electronic Parts Sales and Custom Cable Manufacturing
2240 Pegasus Rd NE, Calgary, AB T2E 8G8
Ph: 403-291-0501 Fx: 403-291-0530 Toll Free: 1-800-882-9301
www.mroelectronics.com

1.0	INITIAL RELEASE	AL	04-08-21
REV NO.	DESCRIPTION	DRN	DATE