


P5C-20GBK
20/ 5 AWM 20233 80C 300V/CSA FT4

| ITEM | SPECS. |
|------|---|
| A. | 20 AWG 7X.0121"TC CONCENTRIC |
| B. | 9 MIL NOMINAL SRPVC INSULATION 80°C 300V 7 MIL MINIMUM SRPVC INSULATION AWM #1061 OD .059"±.002" |
| C. | TISSUE PAPER SEPARATOR |
| D. | 70 MIL NOMINAL PRESSURED POLYURETHANE JACKET 60 MIL MINIMUM PRESSURED POLYURETHANE JACKET COLOR BLACK 80°C 300V |

CABLE IS UL AND CSA RECOGNIZED

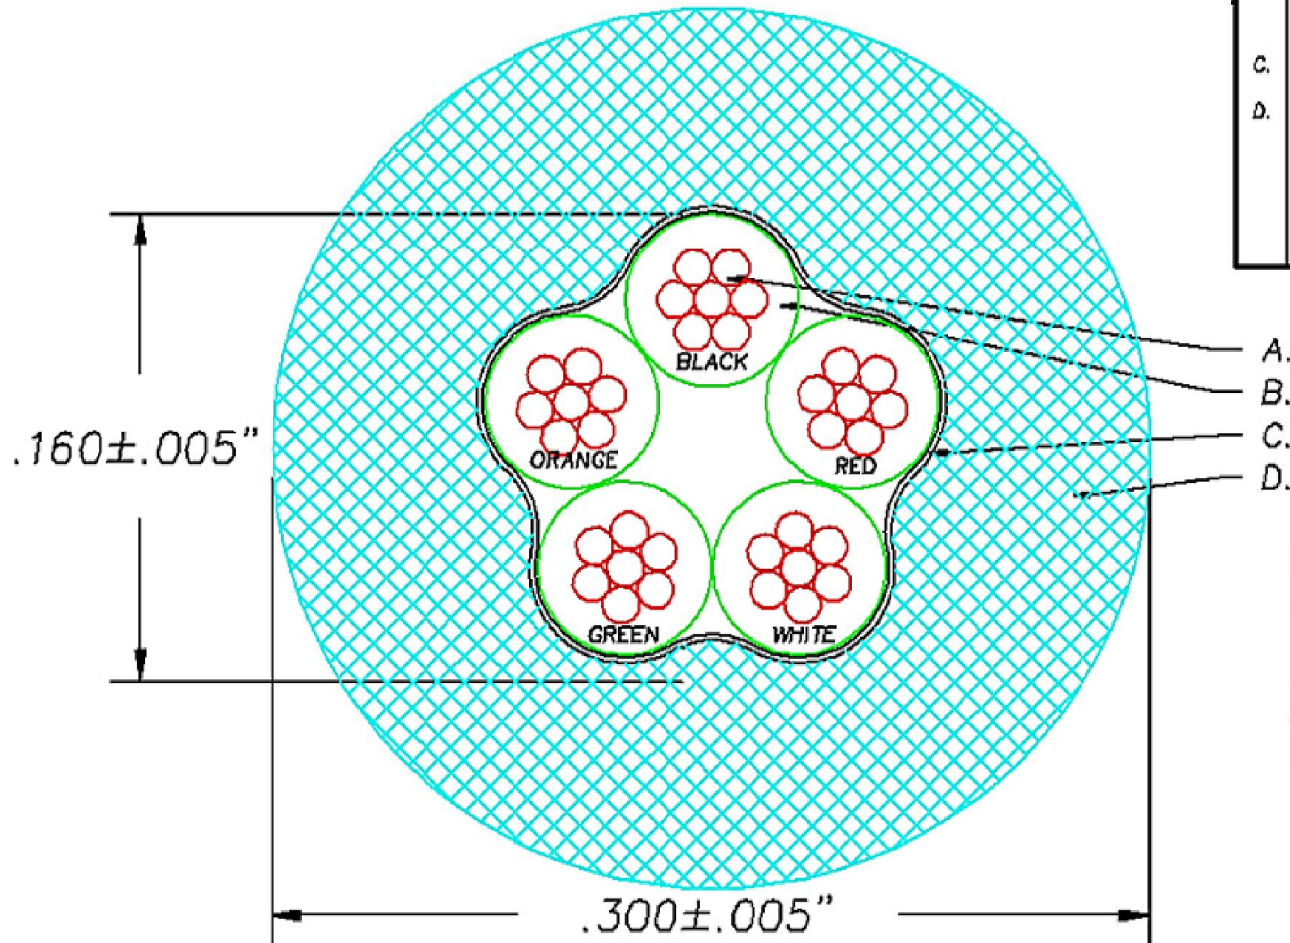

- A.
- B.
- C.
- D.

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
-50°C