

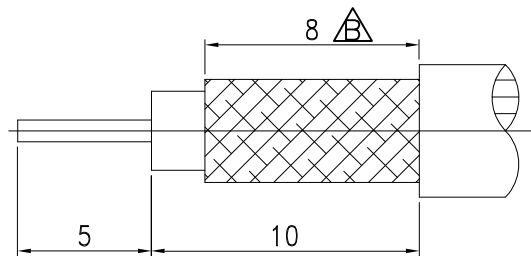
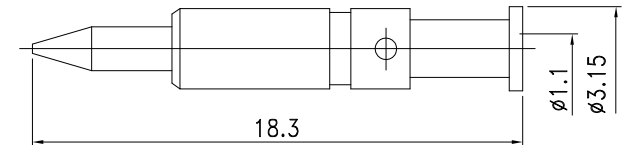


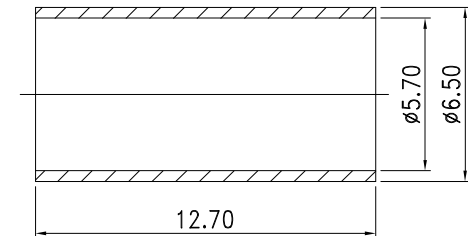

11060501

This information is confidential and is disclosed to you on condition that no further disclosure is made without authorization from MRO

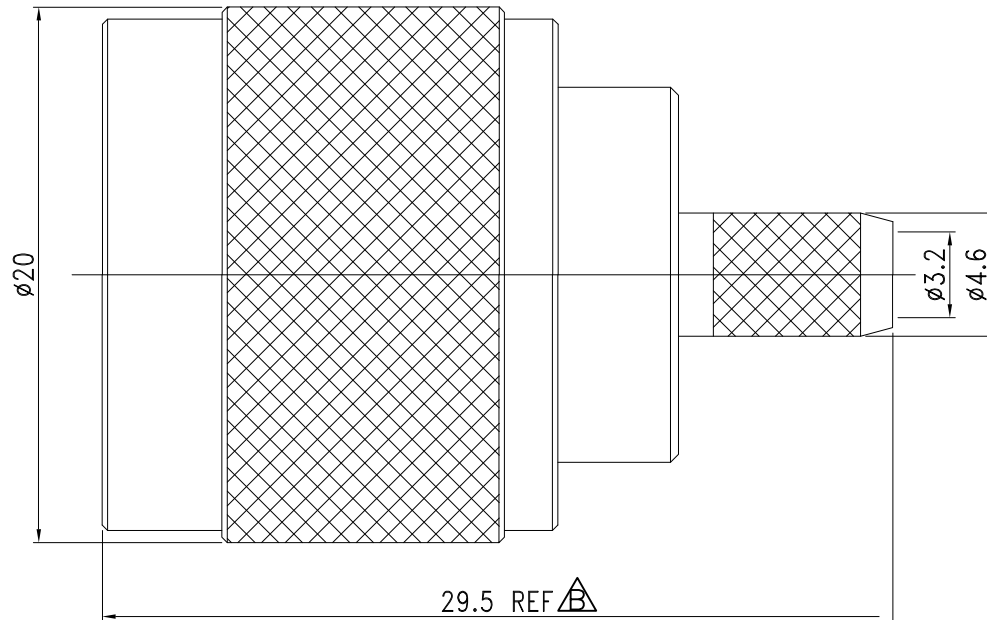

RECOMMENDED
CABLE STRIPPING DIM'S

TOLERANCE	
.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLE	±0.5°

N(M) CRIMP RG223/400/142

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
8.	Ferrule	Brass	1	Nickel
7.	Shell	Brass	1	Nickel
6.	Gasket	Si-Rubber	1	Red
5.	Retaining Ring	Brass	1	Nickel
4.	Barrel	Brass	1	Nickel
3.	Insulation	Teflon	1	None
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel