




P3C-16GBK

16/3 AWM 20233 80C 300V

This information is confidential and is disclosed to you on condition that no further disclosure is made without authorization from MRO

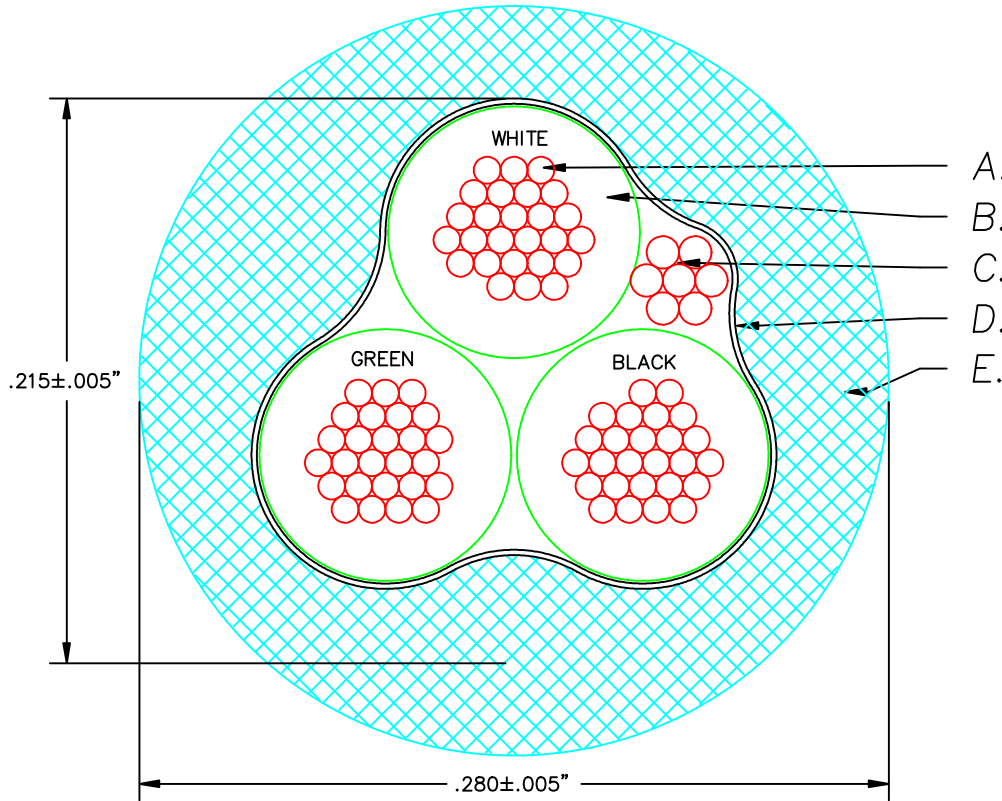

ITEM	SPECS.
A.	16 AWG 26X30TC BUNCHED
B.	15 MIL MINIMUM AVERAGE POLYPROPYLENE INSULATION 13 MIL MINIMUM POLYPROPYLENE INSULATION OD $.094 \pm .002"$ UL 10152
C.	20 AWG 7X.0121"TC DRAIN WIRE
D.	ALUMINUM MYLAR SHIELD
E.	30 MIL MINIMUM AVERAGE PRESSURED POLYURETHANE 24 MIL MINIMUM PRESSURED POLYURETHANE COLOR BLACK UV STABILIZER ADDED UL AND CSA APPROVED RoHS COMPLIANT

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

WHITE INK PRINTED LEGEND:

P3C-16GBK RU AWM E54661 80C 300V CSA AWM LL54185 I/II A/B 80C 300V FT1