


SPECIFICATIONS:

- A. 18 GAUGE 16x.010BC
- B. 15 MIL PVC INSULATION PER AWM 1729
12 MIL MIN. PVC INSULATION
O.D. .079 ±.002
- C. 20 GAUGE 7x.0121TC DRAIN
- D. ALUMINUM FOIL SHIELD; FOIL IN
- E. 30 MIL PRESSURED TPU JACKET 80C 300V
24 MIL MIN. TPU JACKET BLACK JACKET

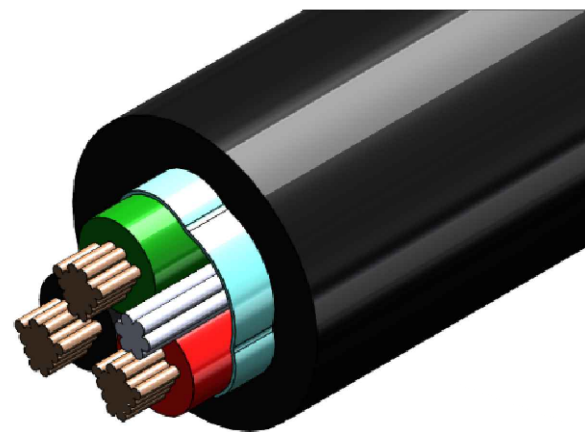

ISOMETRIC VIEW FOR REFERENCE ONLY

UL RECOGNIZED AND CSA CERTIFIED

ROHS3 DIRECTIVE (EU) 2015/863 TO AMEND ANNEX II TO EU ROHS 2, 2011/65/EU WITH NO EXEMPTIONS

LEGEND SPECIFICATIONS: WHITE INK PRINT

OSCEOLA: P3C-18GBK RU AWM E54661 80C 300V CSA AWM LL54185 I/II A/B 80C 300V FT1

SANTA TERESA: P3C-18GBK RU AWM E54661-02 80C 300V "CSA-C/US" AWM LL54185 (02) I/II A/B 80C 300V FT1

MECHANICAL REQUIREMENTS:

WORKING TEMP: -40C TO 80C
UV RESISTANT
1000' PER REEL; TWO LENGTHS PER REEL
MAXIMUM ON 12" PLASTIC REEL



PART NO: P3C-18GBK	
DESCRIPTION: 18/3 AWM 20233 80C 300V	
REVISION	SIZE SHEET
2.0	A 1 OF 1
THIS INFORMATION IS CONFIDENTIAL AND DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE WITHOUT AUTHORIZATION FROM MRO	

MRO
Electronic Supply Ltd
Electronic Parts Sales and Custom Cable Manufacturing
2240 Pegasus Rd NE, Calgary, AB T2E 8G8
Ph: 403-291-0501 Fx: 403-291-0530 Toll Free: 1-800-882-9301
www.mroelectronics.com

2.0	NEW JACKET MATERIAL	AL	05-26-21
REV NO.	DESCRIPTION	DRN	DATE