


SPECIFICATIONS:

- A. 22 AWG TWISTED PAIR
 - A.1. 22 AWG 19x.0058" TC. OD: .028" ±.0005"
 - A.2. 9 MILS POLYPROPYLENE INSULATION. 7 MILS MIN POLYPROPYLENE INSULATION. OD: .050" ±.002" UL AWM STYLE 10152.

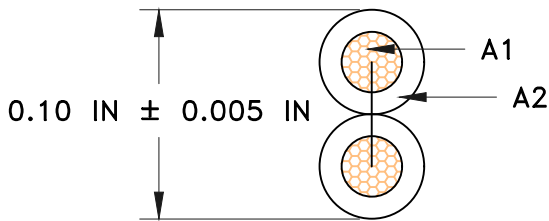

- B. 22 AWG 19x.0056" TC DRAIN WIRE. OD: .028" ±.0058" TC
- C. ALUMINUM FOIL SHIELD (FOIL IN)
- D. 30 MILS PRESSURED BLACK POLYURETHANE. 24 MILS MIN PRESSURED BLACK POLYURETHANE

CONDUCTORS: ORANGE & WHITE TWISTED PAIR
 BLACK & WHITE TWISTED PAIR
 RED & WHITE TWISTED PAIR
 YELLOW & WHITE TWISTED PAIR
 BROWN & WHITE TWISTED PAIR

PRINT COLOR: WHITE

PRINT: P5P-22GBK RU AWM E54661 20233 80C 300V CSA AWM LL54185
 I/II A/B 80C 300V FT1

MECHANICAL REQUIREMENTS:

- CUSTOMER SPECIFIED PAIR LAY: .45" LH

UL RECOGNIZED AWM STYLE & CSA CERTIFIED, UL LISTED
 RoHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU



PART NO:		P5P-22GBK	
DESCRIPTION:		POLY TPU JKT 5 PR 22 AWG SHEILDED	
REVISION	SIZE	SHEET	NO. 1 OF 1
2.0	A		
THIS INFORMATION IS CONFIDENTIAL AND DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE WITHOUT AUTHORIZATION FROM MRO			

MRO
 Electronic Supply Ltd
 2240 Pegasus Rd NE, Calgary, AB T2E 8G8
 Ph: 403-291-0501 Fax: 403-291-0530 Toll Free: 1-800-882-9301
 www.mroelectronics.com

2.0	REFLECTED CSA APPROVED AS PER SUPPLIER CORRECTION	OO	03-06-19
1.0	INITIAL RELEASE	AR	08-02-18
REV NO.	DESCRIPTION	DRN	DATE