


LCAT1004-20

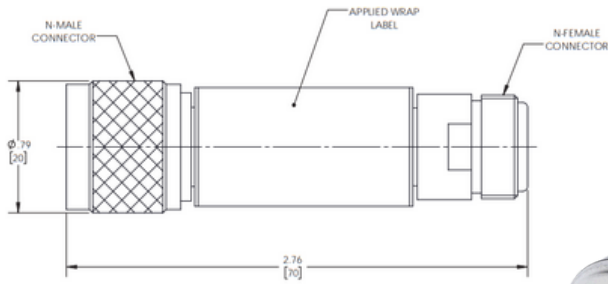

Feature	Specification
Part Number	LCAT1004-20
Type	RF Fixed Attenuator
Frequency Range	DC to 6 GHz
Impedance	50 Ohms
Nominal Attenuation	20 dB
Attenuation Accuracy	0.5 dB
V.S.W.R.	1.3:1
Input Power (Peak)	500 W
Input Power (CW)	2 W
Connector 1	N Male Gold-plated Brass Contact Nickel-plated brass Conductor Nickel-plated Brass Body
Connector 2	N Female Gold-plated Beryllium Copper Contact Nickel-plated Brass Conductor Nickel-plated Brass Body
Operating Temperature	-55 °C to +125 °C
Applications	Instrumentation, RF Test Systems, Production systems, Precision measurements

PART NO:		LCAT1004-20	
DRAWING NO/REV#:		001	
DESCRIPTION:			
20 dB in line attenuator, N male to N female, 2 watts, DC to 6GHz.			
REVISION	SIZE	SHEET	NO. 1 OF 1
THIS INFORMATION IS CONFIDENTIAL AND DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE WITHOUT AUTHORIZATION FROM MRO			

REV NO.	DESCRIPTION	DRN	DATE
			Jan 2026

MRO
Manufacturing you rely on
www.mroelectronics.com
Calgary, Alberta, Canada
1-800-882-9301 403-291-0501
sales@mroelectronics.com
Custom Cable Manufacturing & Electronic Parts Sales