P2C-10GBK

DESC: 10/2 CABLE 90°C 300V BLACK			DWG NO:
SCALE: 12x	DATE: 04/24/12	DR. BY:	
CUSTOMER: MRO ELECTRONIC SUPPLY			

ITEM	SPECS.
A.	10 AWG 105X30TC BUNCHED
B.	31 MIL MINIMUM AVERAGE PVC INSULATION 105°C 25 MIL MINIMUM PVC INSULATION 300V OD .186±.001"
C.	PAPER FILLER
D.	TISSUE PAPER SEPARATOR
E.	30 MIL MINIMUM AVERAGE PRESSURED POLYURETHANE JACKET 24 MIL MINIMUM PRESSURED POLYURETHANE JACKET CABLE IS NOT UL OR CSA RECOGNIZED

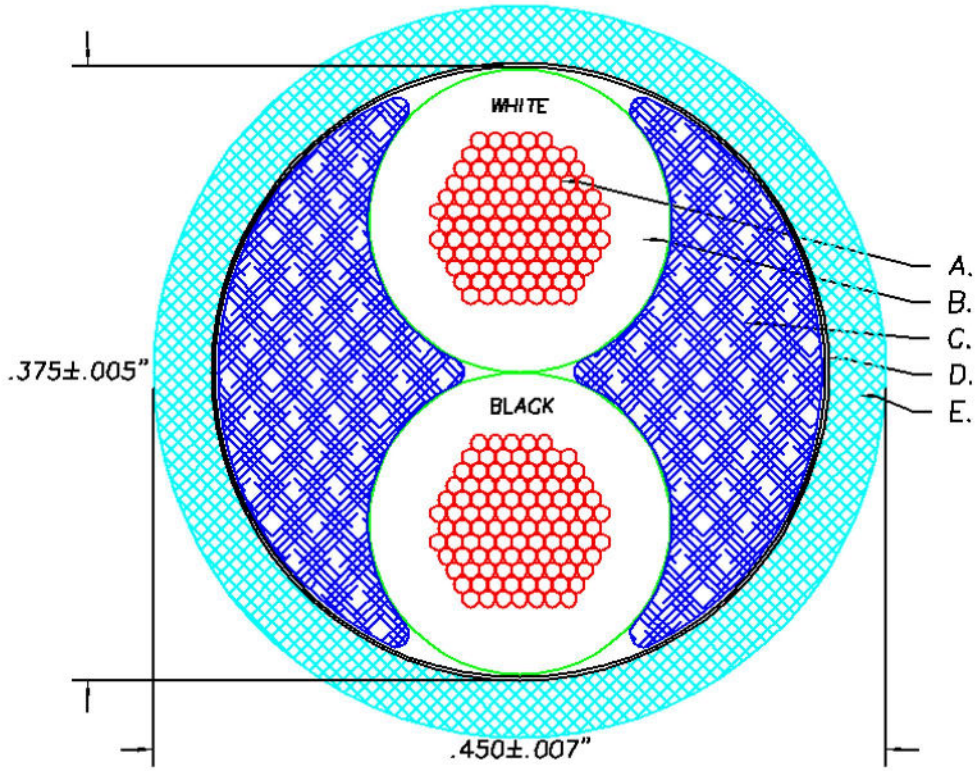

BLACK INK PRINTED LEGEND TO READ:
tbd

ELECTRICAL REQUIREMENTS:

NONE SPECIFIED

MECHANICAL REQUIREMENTS:

NONE SPECIFIED

MRO Electronic Supply Ltd

INITIAL RELEASE	A	04/24/12		
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL