



DESCRIPTION: 16/4 WITH CAT6A 80C 300V CABLE		UNITS: IN	SCALE: 4:1	ITEM	SPECIFICATIONS
MRO ELECTRONICS				A.	16 AWG 26x.0100" TIN PLATED COPPER STRANDED WIRE
CUSTOMER P/N: P4C-CAT6A		DWG NO:		B.	11 MIL MIN POLYPROPYLENE INSULATION OD: .086" ± .002"
		DATE: 3/27/2019	REV: B	C.	TPECAT6A CAT6A CABLE OD .325 ± 0.10"

CORE DIMENSIONS FOR INTERNAL USE ONLY

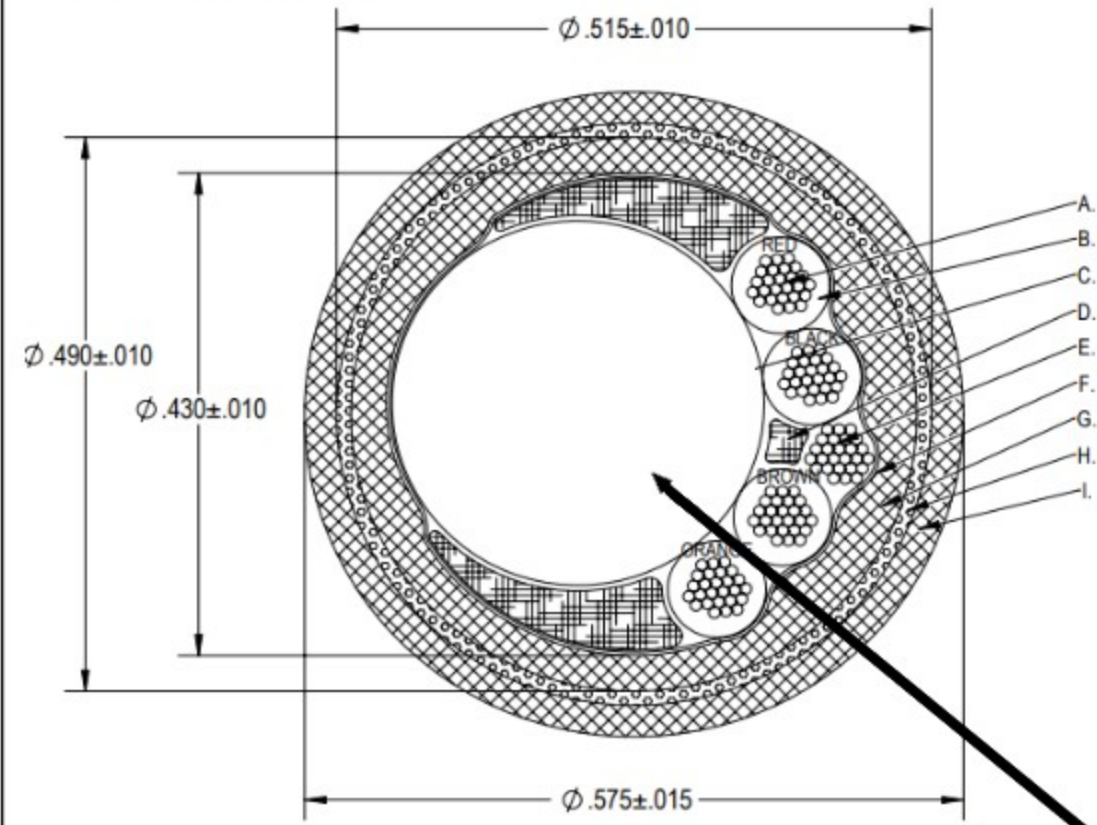

D.	POLY FILLER AS NEEDED FOR ROUNDNESS
E.	16 AWG 26x.0100" TIN PLATED COPPER STRANDED DRAIN WIRE OD: .054" ± .003"
F.	ALUMINUM MYLAR TAPE WRAP (FOIL IN)
G.	20 MIL MIN POLYURETHANE PRESSURED JACK JACKET COLOR BLACK, MATTE FINISH
H.	34 AWG STAINLESS STEEL BRAIDED SHIELD 75% MIN COVERAGE
I.	20 MIL MIN POLYURETHANE PRESSURED JACK JACKET COLOR BLACK, MATTE FINISH
NO AGENCY APPROVALS	
ROHS COMPLIANT MATERIALS TO EU DIRECTIVE 2011/65/EU	

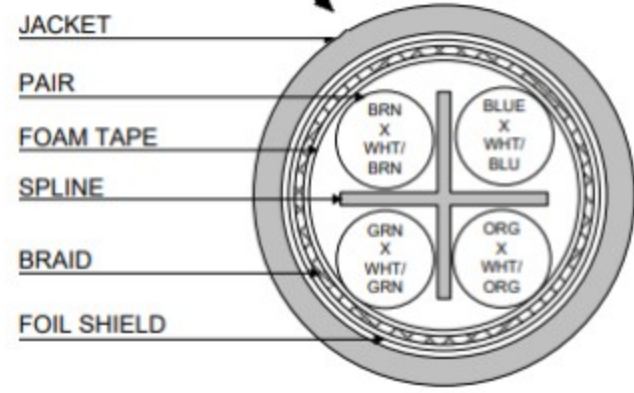

LEGEND SPECIFICATIONS - WHITE INK JET PRINTED
P4C-CAT6A